

Thermaltake A1189 for 2U Server Highest Performance

P/N : A1189
FOR INTEL **P4 2U Server** 478 PIN
up to 2.6 GHz




- Application for INTEL socket 478
- Bergquist 225U interface material
- Metal clip easy to install

SPECIFICATIONS :

Fan Dimension:	70x70x15 mm
Rated Voltage:	12VDC
Started Voltage:	7VDC
Rated Current:	0.21AMP
Power Input:	2.52W
FAN Speed:	4800±10% RPM
Max. Air Flow:	30CFM
Noise:	37dBa
Cooler Dimension:	70x88x51 mm
Bearing Type:	Ball bearing
Lift Time:	50,000 Hours
Connector:	3 Pin
Thermal Resistance:Ca	=0.38 C/W

DIMENSION

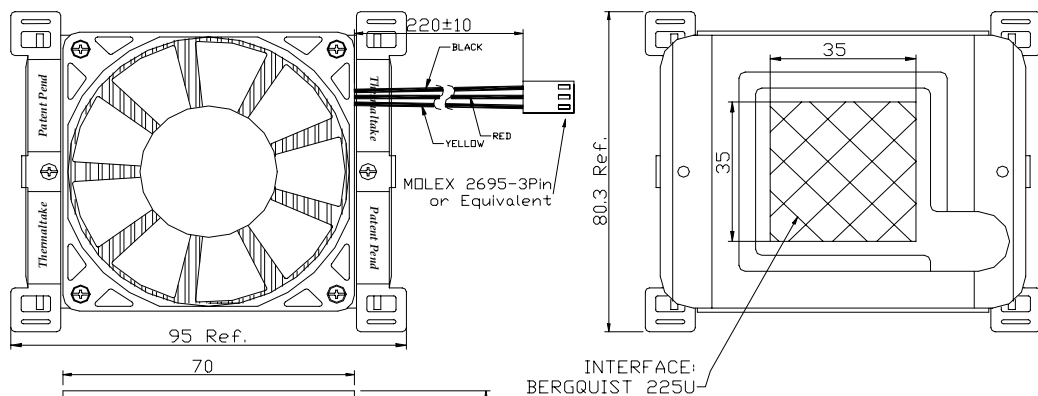

UNIT:mm

<http://www.thermaltake.com>

Performance
cooled
by **Thermaltake**